

BWP ECO Weatherproof Batten Gen2

The high output LED weatherproof batten has longer life and the ability to select your preferred lumen output/wattage within one light fitting.

- Wide 130mm body that easily covers footprint of traditional twin fluoro battens.
- Colour Select providing 3000K/4000K/6000K with multiple lumen options in one batten
- Easy installation with a large terminal block, stainless steel mounting clips, 20mm cable gland and one optional knock-out at the opposite end



LUMEN SELECT™



80

CRI



IP65

Ingress
Protection
Rating



IK08

Impact Rating



5SDCM

MacAdam
Steps



0 to 40

Operating
Temperature



Non -
Dimmable

Dimming



54,000hrs
(L70/B50)

Lifetime



3 Years


Warranty




100°

Beam Angle


CODE	SYSTEM POWER	EXIT LUMEN	CCT	DIMENSIONS	WEIGHT	INRUSH CURRENT	LINE CURRENT
BWPECO202ECS	18W	2500lm	4000K	L655 x W130 x H92 mm	1kg	10.2A	0.08A
		2100lm	3000K				
		2100lm	6000K				
BWPECO404ECSLS	40W	5200lm	4000K	L1265 x W130 x H92 mm	1.9kg	12.3A	0.19A
	33W	4200lm	3000K				
	27W	3600lm					
	20W	2500lm	6000K				
BWPECO505ECS	52W	5200lm	4000K	L1565 x W130 x H92 mm	2.5kg	12.7A	0.24A
		5900lm	3000K				
		5700lm	6000K				

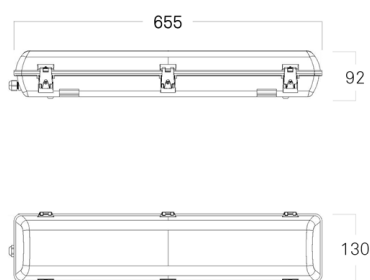

BWPECO202ECS

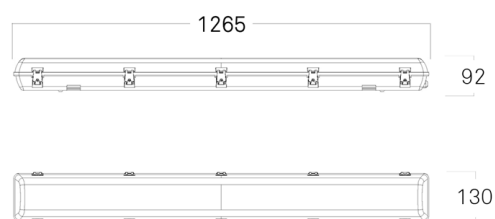

BWPECO404ECSLS

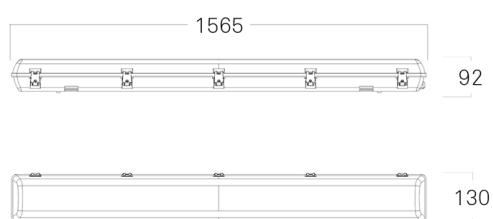

BWPECO505ECS

Product Images



BWPECO202ECS



BWPECO404ECSLS



BWPECO505ECS